

**EDITORS:
C.A. BREBBIA, D. KALIAMPAKOS AND
P. PROCHAZKA**

UNDERGROUND SPACES

**DESIGN, ENGINEERING AND
ENVIRONMENTAL ASPECTS**



Editors:

C.A. Brebbia
Wessex Institute of Technology, UK

D. Kallianpakos
National Technical University of Athens, Greece

P. Prochazka
Czech Technical University, Prague

Published by

WIT Press

Ashurst Lodge, Ashurst, Southampton, SO40 7AA, UK

Tel: 44 (0) 238 029 3223; Fax: 44 (0) 238 029 2853

E-Mail: witpress@witpress.com

<http://www.witpress.com>

For USA, Canada and Mexico

Computational Mechanics Inc

25 Bridge Street, Billerica, MA 01821, USA

Tel: 978 667 5841; Fax: 978 667 7582

E-Mail: infousa@witpress.com

<http://www.witpress.com>

British Library Cataloguing-in-Publication Data

A Catalogue record for this book is available
from the British Library

ISBN: 978-1-84564-125-2

ISSN: 1746-4498 (print)

ISSN: 1743-3509 (on-line)

The texts of the papers in this volume were set individually by the authors or under their supervision. Only minor corrections to the text may have been carried out by the publisher.

No responsibility is assumed by the Publisher, the Editors and Authors for any injury and/or damage to persons or property as a matter of products liability, negligence or otherwise, or from any use or operation of any methods, products, instructions or ideas contained in the material herein. The Publisher does not necessarily endorse the ideas held, or views expressed by the Editors or Authors of the material contained in its publications.

© WIT Press 2008

Printed in Great Britain by Athenaeum Press Ltd.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of the Publisher.

Preface

This book contains some of the papers presented at the International Conference on Underground Spaces – Design, Engineering and Environmental Aspects, held on the Campus of the Wessex Institute of Technology in the New Forest. The Conference was launched to discuss not only the structural and environmental material characterization aspects but also the trends regarding the development of underground spaces.

Underground spaces are becoming increasingly important for a wide diversity of uses. They range from classical excavations to subway constructions, underground sports halls, power stations, waste repositories, underground cities and many others. The construction techniques are also very varied, from open air excavation to newly developed injection methods.

The use of underground spaces is challenging to a wide spectrum of engineers, designers and builders. Structures constructed below the terrain require special attention in their design and safety assessment. This means that the degree of knowledge needs to be significantly different than for surface structures and hence the importance of conferences like Underground Spaces to reach a better understanding of the issues involved. This is particularly the case when preparing to build chemical, nuclear or toxic waste repositories, where serious environmental issues can arise.

The papers presented at the Conference described a variety of problems related to underground spaces. The Editors are grateful to all contributors for their papers and particularly to the members of the International Scientific Advisory Committee who helped to select the material published in this book.

The Editors

The New Forest, 2008

FIRST INTERNATIONAL CONFERENCE ON
UNDERGROUND SPACES – DESIGN, ENGINEERING AND
ENVIRONMENTAL ASPECTS

Underground Spaces

CONFERENCE CHAIRMEN

C.A. Brebbia

Wessex Institute of Technology, UK

D. Kaliampakos

National Technical University of Athens, Greece

P. Prochazka

Czech Technical University, Prague

INTERNATIONAL SCIENTIFIC ADVISORY COMMITTEE

A. Benardos
V. Dolezel
M. Kaminski
G. Ma
P. Paulini
V. Popov
R. Pusch
J. Zhao
H. Zhu

Organised by

Wessex Institute of Technology, UK

Sponsored by

WIT Transactions on the Built Environment

WIT Transactions

Transactions Editor

Carlos Brebbia

*Wessex Institute of Technology
Ashurst Lodge, Ashurst
Southampton SO40 7AA, UK
Email: carlos@wessex.ac.uk*

Editorial Board

- | | |
|--|--|
| B Aberssek University of Maribor, Slovenia | M P Bekasos Democritus University of Thrace, Greece |
| Y N Abousteiman University of Oklahoma, USA | G Belingardi Politecnico di Torino, Italy |
| P L Aguilar University of Extremadura, Spain | R Belmans Katholieke Universiteit Leuven, Belgium |
| K S Al Jabri Sultan Qaboos University, Oman | C D Bertram The University of New South Wales, Australia |
| E Alarcón Universidad Politécnica de Madrid, Spain | D E Beskos University of Patras, Greece |
| A Aldama IMTA, Mexico | S K Bhattacharyya Indian Institute of Technology, India |
| C Alessandri Università di Ferrara, Italy | E Blums Latvian Academy of Sciences, Latvia |
| D Almorza Gomar University of Cadiz, Spain | J Boarder Cartref Consulting Systems, UK |
| B Alzahabi Kettering University, USA | B Robee Institut National de la Recherche Scientifique, Canada |
| J A C Ambrosio IDMEC, Portugal | H Boileau ESIGEC, France |
| A M Amer Cairo University, Egypt | J J Bommer Imperial College London, UK |
| S A Anagnostopoulos University of Patras, Greece | M Bonnet Ecole Polytechnique, France |
| M Andretta Moncattini, Italy | C A Borrego University of Aveiro, Portugal |
| E Angelino A.R.P.A. Lombardia, Italy | A R Bretones University of Granada, Spain |
| H Antes Technische Universität Braunschweig, Germany | J A Bryant University of Exeter, UK |
| M A Atherton South Bank University, UK | F - G Buchholz Universität Gesamthochschule Paderborn, Germany |
| A G Atkins University of Reading, UK | M B Bush The University of Western Australia, Australia |
| D Aubry Ecole Centrale de Paris, France | F Baterra Politecnico di Milano, Italy |
| H Azegami Toyohashi University of Technology, Japan | J Byrne University of Portsmouth, UK |
| A F M Azevedo University of Porto, Portugal | W Cantwell Liverpool University, UK |
| J Baish Bucknell University, USA | D J Cartwright Bucknell University, USA |
| J M Baldasano Universität Politecnica de Catalunya, Spain | P G Carydis National Technical University of Athens, Greece |
| J G Bartzis Institute of Nuclear Technology, Greece | J J Casares Long Universidad de Santiago de Compostela, Spain |
| A Bejan Duke University, USA | M A Celia Princeton University, USA |
| | A Chakrabarti Indian Institute of Science, India |

- S K Chakrabarti Offshore Structure Analysis, USA
- A H-D Cheng University of Mississippi, USA
- J Chilton University of Lincoln, UK
- C-L Chin University of Pittsburgh, USA
- H Choi Kangnung National University, Korea
- A Gieslak Technical University of Lodz, Poland
- S Clement Transport System Centre, Australia
- M W Collins Brunel University, UK
- J J Connor Massachusetts Institute of Technology, USA
- M C Constantinou State University of New York at Buffalo, USA
- D E Cormack University of Toronto, Canada
- M Costantino Royal Bank of Scotland, UK
- D F Cutler Royal Botanic Gardens, UK
- W Czyzeczka Krakow University of Technology, Poland
- M da Conceicao Cunha University of Coimbra, Portugal
- A Davies University of Hertfordshire, UK
- M Davis Temple University, USA
- A B de Almeida Instituto Superior Tecnico, Portugal
- E R de Arantes e Oliveira Instituto Superior Tecnico, Portugal
- L De Biase University of Milan, Italy
- R de Borst Delft University of Technology, Netherlands
- G De Mey University of Ghent, Belgium
- A De Montis Universita di Cagliari, Italy
- A De Naeyer Universiteit Ghent, Belgium
- W P De Wilde Vrije Universiteit Brussel, Belgium
- L Debnath University of Texas-Pan American, USA
- N J Dedios Mimbela Universidad de Cordoba, Spain
- G Degrande Katholieke Universiteit Leuven, Belgium
- S del Giudice University of Udine, Italy
- G Deplano Universita di Cagliari, Italy
- I Delfshtis University of Stuttgart, Germany
- M Domaszewski Universite de Technologie de Belfort-Montbeliard, France
- J Dominguez University of Seville, Spain
- K Dorow Pacific Northwest National Laboratory, USA
- W Dover University College London, UK
- C Dowlen South Bank University, UK
- J P du Plessis University of Stellenbosch, South Africa
- R Duffell University of Hertfordshire, UK
- A Ebel University of Cologne, Germany
- E E Edontos Democritus University of Thrace, Greece
- G K Egan Monash University, Australia
- K M Elawadly Alexandria University, Egypt
- K-H Elmer Universitat Hannover, Germany
- D Elms University of Canterbury, New Zealand
- M E M El-Sayed Kettering University, USA
- D M Elson Oxford Brookes University, UK
- A El-Zafarani Cranfield University, UK
- F Erdogan Lehigh University, USA
- F P Escrig University of Seville, Spain
- D J Evans Nottingham Trent University, UK
- J W Everett Rowan University, USA
- M Faghihi University of Rhode Island, USA
- R A Falconer Cardiff University, UK
- M N Fardis University of Patras, Greece
- P Fedelinski Silesian Technical University, Poland
- H J S Fernando Arizona State University, USA
- S Finger Carnegie Mellon University, USA
- J I Frankel University of Tennessee, USA
- D M Fraser University of Cape Town, South Africa
- M J Fritzer University of Calgary, Canada
- U Gabbert Otto-von-Guericke Universitat Magdeburg, Germany
- G Gambolati Universita di Padova, Italy
- C J Gantes National Technical University of Athens, Greece
- L Gaul Universitat Stuttgart, Germany
- A Genço University of Palermo, Italy
- N Georganizis Universitat Jaume I, Spain
- G S Gipson Oklahoma State University, USA
- P Giudici Universita di Pavia, Italy
- F Gomez Universidad Politecnica de Valencia, Spain
- R Gomez Martin University of Granada, Spain
- D Goulas University of Maryland, USA
- K G Goulias Pennsylvania State University, USA
- F Grandori Politecnico di Milano, Italy
- W E Grant Texas A & M University, USA
- S Grilli University of Rhode Island, USA
- R H J Grimshaw, Loughborough University, UK
- D Gross Technische Hochschule Darmstadt, Germany
- R Grundmann Technische Universitat Dresden, Germany
- A Gualtierotti IDHEAP, Switzerland
- R C Gupta National University of Singapore, Singapore
- J M Hale University of Newcastle, UK
- K Haney Katholieke Universiteit Leuven, Belgium
- C Hanke Danish Technical University, Denmark
- K Hayami National Institute of Informatics, Japan
- Y Hayashi Nagoya University, Japan
- L Haydock Newage International Limited, UK
- A H Hendrickx Free University of Brussels, Belgium
- C Herman John Hopkins University, USA
- S Heslop University of Bristol, UK
- I Hhideki Nagoya University, Japan
- D A Hills University of Oxford, UK
- W F Huebner Southwest Research Institute, USA
- J A C Humphrey Bucknell University, USA
- M Y Hussaini Florida State University, USA
- W Hutchinson Edith Cowan University, Australia
- T H Hyde University of Nottingham, UK
- M Iguchi Science University of Tokyo, Japan
- D B Ingham University of Leeds, UK
- L Int Panis VITO Expertisecentrum IMS, Belgium
- N Ishikawa National Defence Academy, Japan
- J Jaafar UiTM, Malaysia
- W Jager Technical University of Dresden, Germany
- Y Jaluria Rutgers University, USA
- C M Jefferson University of the West of England, UK
- P R Johnston Griffith University, Australia
- D R H Jones University of Cambridge, UK
- N Jones University of Liverpool, UK
- D Kalitampakos National Technical University of Athens, Greece
- N Kamiya Nagoya University, Japan
- D L Karabalis University of Patras, Greece
- M Karlsson Linköping University, Sweden
- T Katayama Doshisha University, Japan
- K L Katsifarakis Aristotle University of Thessaloniki, Greece
- J T Katsikadelis National Technical University of Athens, Greece
- E Kausel Massachusetts Institute of Technology, USA
- H Kawashima The University of Tokyo, Japan
- B A Kazimee Washington State University, USA
- S Kim University of Wisconsin-Madison, USA
- D Kirkland Nicholas Grimshaw & Partners Ltd, UK
- E Kita Nagoya University, Japan
- A S Kobayashi University of Washington, USA
- T Kobayashi University of Tokyo, Japan
- D Koga Saga University, Japan
- A Konrad University of Toronto, Canada
- S Kotake University of Tokyo, Japan
- A N Kounadis National Technical University of Athens, Greece
- W B Kratzig Ruhr Universitat Bochum, Germany
- T Krauthammer Penn State University, USA
- C-H Lai University of Greenwich, UK
- M Langseth Norwegian University of Science and Technology, Norway
- B S Larsen Technical University of Denmark, Denmark
- F Lattarulo, Politecnico di Bari, Italy
- A Lebedev Moscow State University, Russia
- L J Leon University of Montreal, Canada
- D Lewis Mississippi State University, USA
- S Ighobashi University of California Irvine, USA

- K-C Lin University of New Brunswick,
Canada
- A A Ilioths Democritus University of
Thrace, Greece
- S Lomov Katholieke Universiteit Leuven,
Belgium
- J W S Longhurst University of the West
of England, UK
- G Loo The University of Auckland, New
Zealand
- J Lourenco Universidade do Minho,
Portugal
- J E Luceo University of California at San
Diego, USA
- H Lui State Seismological Bureau Harbin,
China
- C J Lumsden University of Toronto,
Canada
- L Lundqvist Division of Transport and
Location Analysis, Sweden
- T Lyons Murdoch University, Australia
- Y-W Mai University of Sydney, Australia
- M Majowicki University of Bologna, Italy
- D Materba Università degli Studi di Bari,
Italy
- G Manara University of Pisa, Italy
- B N Mandal Indian Statistical Institute,
India
- Ü Mander University of Tartu, Estonia
- H A Mang Technische Universität Wien,
Austria
- G D, Manolis, Aristotle University of
Thessaloniki, Greece
- W J Mansur COPPE/UFRI, Brazil
- N Marchettini University of Siena, Italy
- J D M Marsh Griffith University, Australia
- J F Martin-Duque Universidad
Complutense, Spain
- T Matsui Nagoya University, Japan
- G Matrisch DaimlerChrysler AG, Germany
- F M Mazzolani University of Naples
"Federico II", Italy
- K McManis University of New Orleans,
USA
- A C Mendes Universidade de Beira Interior,
Portugal
- R A Meric Research Institute for Basic
Sciences, Turkey
- J Mikielewicz Polish Academy of Sciences,
Poland
- N Millie-Frayling Microsoft Research Ltd,
UK
- R A W Mines University of Liverpool, UK
- C A Mitchell University of Sydney,
Australia
- K Miura Kajima Corporation, Japan
- A Miyamoto Yamaguchi University, Japan
- T Miyoshi Kobe University, Japan
- G Moihari University of Genoa, Italy
- T B Moodie University of Alberta, Canada
- D B Murray Trinity College Dublin, Ireland
- G Nakhelzadeh DaimlerChrysler AG,
Germany
- M B Neace Mercer University, USA
- D Neculescu University of Ottawa, Canada
- F Neumann University of Vienna, Austria
- S-I Nishida Saga University, Japan
- H Nishitani Kyushu Sangyo University,
Japan
- B Notaros University of Massachusetts,
USA
- P O'Donoghue University College Dublin,
Ireland
- R O O'Neill Oak Ridge National
Laboratory, USA
- M Okkasu Kyushu University, Japan
- G Oliveto Università di Catania, Italy
- R Olsen Camp Dresser & McKee Inc., USA
- E Olate University Politecnica de
Catalunya, Spain
- K Onishi Ibaraki University, Japan
- P H Oosthuizen Queens University, Canada
- E L Ortiz Imperial College London, UK
- E Ota Waseda University, Japan
- A S Papageorgiou Rensselaer Polytechnic
Institute, USA
- J Park Seoul National University, Korea
- G Passerini Università delle Marche, Italy
- B C Patten, University of Georgia, USA
- G G Pelosi University of Florence, Italy
- G G Penelis, Aristotle University of
Thessaloniki, Greece
- W Perrie Bedford Institute of
Oceanography, Canada
- R Pietrabissa Politecnico di Milano, Italy
- H Pina Instituto Superior Tecnico, Portugal
- M F Platzler Naval Postgraduate School,
USA
- D Poljak University of Split, Croatia
- V Popov Wessex Institute of Technology,
UK
- H Power University of Nottingham, UK
- D Prandle Proudman Oceanographic
Laboratory, UK
- M Predeleanu University Paris VI, France
- M R I Purvis University of Portsmouth, UK
- I S Putra Institute of Technology Bandung,
Indonesia
- Y A Pytkh Russian Academy of Sciences,
Russia
- F Rachidi EMC Group, Switzerland
- M Rahman Dalhousie University, Canada
- K R Rajagopal Texas A & M University,
USA
- T Raag Tallinn Technical University,
Estonia
- J Rao Case Western Reserve University,
USA
- A M Reinborn State University of New
York at Buffalo, USA
- A D Rey McGill University, Canada
- D N Riahi University of Illinois at Urbana-
Champaign, USA
- B Ribas Spanish National Centre for
Environmental Health, Spain
- K Richter Graz University of Technology,
Austria
- S Rinaldi Politecnico di Milano, Italy
- F Robuste Universitat Politècnica de
Catalunya, Spain
- J Roddick Flinders University, Australia
- A C Rodrigues Universidade Nova de
Lisboa, Portugal
- F Rodrigues Poly Institute of Porto,
Portugal
- C W Roeder University of Washington,
USA
- J M Roesset Texas A & M University, USA
- W Roetzal Universitaet der Bundeswehr
Hamburg, Germany
- V Roje University of Split, Croatia
- R Rössel Laboratoire d'Aerologie, France
- J L Rubio Centro de Investigaciones sobre
Desertificacion, Spain
- T J Rudolph Iowa State University, USA
- S Russenhuack Magnet Group, Switzerland
- H Ryssel Fraunhofer Institut Integrierte
Schaltungen, Germany
- S G Saad American University in Cairo,
Egypt
- M Salidi University of Nevada-Reno, USA
- R San Jose Technical University of Madrid,
Spain
- F J Sanchez-Sesma Instituto Mexicano del
Petroleo, Mexico
- B Sarter Nova Gorica Polytechnic, Slovenia
- S A Savidis Technische Universität Berlin,
Germany
- A Savini Università de Pavia, Italy
- G Schmid Ruhr-Universität Bochum,
Germany
- R Schmidt RWTH Aachen, Germany
- B Scholtes Universitaet of Kassel, Germany
- W Schreiber University of Alabama, USA
- A P S Selvadurai McGill University, Canada
- J J Sendra University of Seville, Spain
- J J Sharp Memorial University of
Newfoundland, Canada
- Q Shen Massachusetts Institute of
Technology, USA
- X Shixiong Fudan University, China
- G C Sih Lehigh University, USA
- L C Simoes University of Coimbra,
Portugal
- A C Singhal Arizona State University, USA
- P Skerget University of Maribor, Slovenia
- J Sladek Slovak Academy of Sciences,
Slovakia
- V Sladek Slovak Academy of Sciences,
Slovakia
- A C M Sousa University of New Brunswick,
Canada
- H Sozer Illinois Institute of Technology,
USA
- D B Spalding CHAM, UK
- P D Spanos Rice University, USA
- T Speck Albert-Ludwigs-Universität
Freiburg, Germany
- C C Spyraikos National Technical
University of Athens, Greece
- I V Stangeeva St Petersburg University,
Russia
- J Stasiek Technical University of Gdansk,
Poland
- G E Swaters University of Alberta, Canada
- S Syngellakis University of Southampton,
UK
- J Szanyd University of Mining and
Metallurgy, Poland
- S T Tadano Hokkaido University, Japan

- H Takemura** Okayama University, Japan
I Takewaki Kyoto University, Japan
C-L Tan Carleton University, Canada
M Tanaka Shinshu University, Japan
E Taniguchi Kyoto University, Japan
S Tanimura Aichi University of Technology, Japan
J L Tassoulas University of Texas at Austin, USA
M A P Taylor University of South Australia, Australia
A Terranova Politecnico di Milano, Italy
E Tiezzi University of Siena, Italy
A G Tijhuis Technische Universiteit Eindhoven, Netherlands
T Tirabassi Istituto FISBAT-CNR, Italy
S Tkachenko Otto-von-Guericke-University, Germany
N Tosaka Nihon University, Japan
T Tran-Cong University of Southern Queensland, Australia
R Tremblay Ecole Polytechnique, Canada
I Tsukrov University of New Hampshire, USA
R Turra CINECA Interuniversity Computing Centre, Italy
S G Tushinski Moscow State University, Russia
J-L Uzo Universitat Jaume I, Spain
E Van den Bulck Katholieke Universiteit Leuven, Belgium
D Van den Poel Ghent University, Belgium
R van der Heijden Radboud University, Netherlands
R van Duin Delft University of Technology, Netherlands
- P Vas** University of Aberdeen, UK
W S Venturini University of Sao Paulo, Brazil
R Verhoeven Ghent University, Belgium
A Vignat Universitat Jaume I, Spain
Y Villacampa Esteve Universidad de Alicante, Spain
F F V Vincent University of Bath, UK
S Walker Imperial College, UK
G Walters University of Exeter, UK
B Weiss University of Vienna, Austria
H Westphal University of Magdeburg, Germany
J R Whiteman Brunel University, UK
Z-Y Yan Peking University, China
S Yanniotis Agricultural University of Athens, Greece
A Yeh University of Hong Kong, China
J Yoon Old Dominion University, USA
K Yoshizato Hiroshima University, Japan
T X Yu Hong Kong University of Science & Technology, Hong Kong
M Zador Technical University of Budapest, Hungary
K Zakrzewski Politechnika Lodzka, Poland
M Zanfir University of Western Ontario, Canada
R Zarnic University of Ljubljana, Slovenia
G Zharkova Institute of Theoretical and Applied Mechanics, Russia
N Zhong Machashi Institute of Technology, Japan
H G Zimmermann Siemens AG, Germany

Underground Spaces

Design, Engineering and
Environmental Aspects

Editors

C.A. Brebbia

Wessex Institute of Technology, UK

D. Kaliampakos

National Technical University of Athens, Greece

P. Prochazka

Czech Technical University, Prague



Contents

| | |
|--|----|
| Underground space development: setting modern strategies <i>D. Kaliampakos & A. Benardos</i> | 1 |
| Blast impact on structures of underground parking <i>P. P. Procházka, A. N. Kravtsov & S. Peskova</i> | 11 |
| Artificial intelligence in underground development: a study of TBM performance <i>A. Benardos</i> | 21 |
| Reinforcement fibers in concrete envelopes of underground nuclear power stations <i>V. Doležel & P. Procházka</i> | 33 |
| The hydrogeological problems of disused mines in Olgiate Molgora (LC) <i>L. Longoni & M. Papini</i> | 43 |
| Management of complex underground construction projects <i>M. Leijten</i> | 53 |
| Underground nuclear parks: new approach for the deployment of nuclear energy systems <i>C. W. Myers, J. M. Mahar, J. F. Kanze & N. Z. Elkins</i> | 63 |
| Use of a numerical model for underground stability evaluation <i>L. Longoni & M. Papini</i> | 71 |
| Tunnel face stability as a function of the purchase length <i>J. Trčková, P. P. Procházka & S. Peskova</i> | 81 |
| 3-dimensional mesh generation using the Delaunay method <i>R. Hoshiko & M. Kawahara</i> | 91 |

| | |
|--|-----|
| Emergency guidelines for two abandoned mines in Piani dei Resinelli area (Lecco) <i>M. Papini, L. Longoni & K. Dell'Orto</i> | 99 |
| Damage zones near excavations: plastic solution by means of stress trajectories <i>P. Haderka & A. N. Galymbin</i> | 109 |
| CFD simulation of aerodynamic resistance in underground spaces ventilation <i>I. Diego, S. Torro & J. Torano</i> | 119 |
| Fragments of a buried urban past revealed through multi-layered voids hidden below the mosque of St. Daniel: the case of the underground museum in Tarsus <i>M. Cetin & S. Doyduk</i> | 129 |
| Increase of stability of underground works <i>K. Weiglová & P. Procházka</i> | 139 |
| Underground spaces and indoor comfort: the case of "Sassi di Matera" <i>A. Guida, A. Pagliuca & G. Rospi</i> | 149 |
| Rock burst mechanics as a time dependent event <i>J. Vacek & S. Hrachová-Sedláčková</i> | 159 |
| Spatial organization and economic analysis in sustainable transit oriented development <i>N. Mohajeri</i> | 169 |
| The effect of a baffle on the heat transfer in underground auxiliary ventilation systems <i>S. M. Aminossadati & B. Ghaseini</i> | 179 |
| Parameter identification of the elastic modulus of ground rock based on blasting using the first order adjoint method <i>T. Ishimoto & M. Kawahara</i> | 189 |
| Author Index | 199 |

Underground space development: setting modern strategies

D. Kaliampakos & A. Benardos
National Technical University of Athens,
School of Mining & Metallurgical Engineering, Greece

Abstract

Underground space development is an irreversible trend especially in urban environments. At this time the underground facilities have proved their usefulness in terms of efficiency and environmental friendliness. Nevertheless, in order to fully exploit the subsurface, new strategies need to be adopted in the whole context of city planning. This includes the introduction of new terms such as the valuation of the underground space, the adoption of integrated planning and zoning policies of the underground uses and the modernisation of the legal framework to incorporate the three-dimensional partition of the property. This paper discusses these issues, the adoption of which can lead to the development of a strategic underground plan, facilitating and further mobilising the hidden potential of underground space utilisation.

Keywords: valuation of underground space, planning and zoning of the subsurface, ownership rights of underground space.

1 Introduction

It has long been recognized that the utilization of the underground space represents a proficient choice to provide solutions to pressing urban problems. Nevertheless, underground projects have been rather focused, until the early 1970s, on the development of transportation infrastructure [1]. Nonetheless, the construction of major transit projects such as metros and road tunnels is just a prelude for the true nature of underground development. The latter encompasses the relocation of several surface land uses or activities, in which installation is difficult, impractical, less profitable, or even environmentally undesirable on the ground level, into subsurface built environments. In the last couple of decades

Underground spaces and indoor comfort: the case of “Sassi di Matera”

A. Guida¹, A. Pagliuca² & G. Rospi³

¹*Department of Architecture, Planning and Infrastructures for Transport,
School of Engineering, University of Basilicata, Italy*

²*DAU, School of Engineering, Polytechnic University of Bari, Italy*

³*School of Engineering – Università Politecnica delle Marche, Italy*

Abstract

Underground architecture, like the “Sassi” in Matera, makes people imagine life in the past and reconsider present life in these places “without time” and how to “live” them, again like in the “past”. This scientific research focuses on the quality of indoor living in this particular type of architecture.

Today indoor comfort is essential, because 85-90% of time is spent in closed spaces (rooms, work environment, etc.). Closed air, can be for people, more polluting and harmful than open air, as, inside we also have other harmful agents (germs, gas, dust and so on) whose danger is often undervalued.

Today it is very important while projecting to consider first of all the quality of indoor air and comfort.

The aim of this research is to analyse the thermal and hygrometer performance of underground spaces and to show how traditional Mediterranean masonry offers, also today, a high level of indoor comfort.

We did this with tests “in situ” monitoring indoor comfort (as low requests UNI EN ISO 7730 1997 and UNI EN ISO 7726 2002, by directive CEE n° 106/89).

The experiment was verified through the experimental applications in the restoration of two urban buildings in ancient “Sassi” in Matera, reconverted into hotels, the “Locanda di S. Martino” and “Hotel S. Angelo”, that demonstrates as said before and how these building are suitable with the performance requirement that is required from residence environments (European Directive 2002/91/CE and Italian law D.lgs 192/05 – 311/06) even if they are built with traditional technologies.

Keywords: comfort indoor, air quality, underground space.



1 Introduction

The action follows not simply the existing environment, but it turns producing a stratification of interventions based on management that are not always harmonious in the space. This process of transformation is an irreversible step, an action that is intended to permanently change the structure of a place changing also significantly the shape.

The instrument of this anthropization process of space is the stone which, with its unique technical characteristics and morphological-formal, becomes the obvious sign of this process.

The use of stone in architecture, in fact, has produced numerous applications, complex and highly heterogeneous between them from: the structures dug into the rock to built-up structures; initially they conceived as a natural continuation of the first, reaching then, their own formal autonomy and typological realizing the basic cell constructive called "lamia" or "lamione". And this is the process that has overseen the birth and development of the ancient districts "Sassi di Matera", in which the relationship between structures and built dug reaches its highest expression and formalization morphological.

The research included in a broader study, still ongoing is aimed to define the methodological and operational aspects of the recovery of these districts; part-type from morphological of this specific architectural context and aims to assess the possibility of obtaining performance requirements meet the quality standards today required by residence in building even in buildings with technical and constructive traditional features.

Through tests "in situ" aimed at monitoring of comfort "indoors" (as defined by UNI EN ISO 7730 1997 and UNI EN ISO 7726 2002, the EEC Directive N. 106/89), the study aims to highlight methods in which these spaces can guarantee good comfort conditions and considerable quality performance.

2 Indoor comfort

The term "indoor environment" is used to indicate all those confined environment of life and work that includes housing, offices, premises for recreational and/or social where people spend most of their life. Indeed, on average, the population spends more than 70% of their time in these environments undergoing, in fact, a prolonged contact with potential pollutant sources contained therein.

So the assessment of indoor comfort becomes a prerequisite for global comfort. This condition can be reached considering the air-quality comfort and thermo-hygrometric comfort.

The air-quality comfort mainly concerns the indoor concentrations of a variety of substances chemical predominantly nature: among these the most important ones are carbon dioxide, carbon monoxide, sulphur dioxide, radon, formaldehyde and all those volatile organic compounds that have serious consequences on the health of people.



It follows that to reach air-quality comfort we must maintain the values of concentration of these pollutants less than determinate minimum levels set by rule. This is possible mainly through a constant replacement of air which is dimensioned depending on the type of environments, their destinations use and the average capacity of people.

The thermo-hygrometric comfort, instead, is a function of a number of parameters: environmental (temperature, relative humidity, wind speed, solar radiation and atmospheric pressure), linked to physical activities (energy metabolic M), related to clothing worn (thermal clothing I_{cl}) and the percentage of metabolic energy used for carrying out the physical activities (performance mechanical – value).

The current European regulations about thermo-hygrometric performance classify indoor environments in three different types: environments “moderate” environments “severe hot” and environments “severe cold”, each of which must comply with different levels of comfort.

The research focuses on thermal environments “moderate”, namely those where the indoor conditions remain almost equal without considerable heat exchanges located between subject and environment that have significant effects on the overall heat balance (i.e. homes, offices, businesses, etc.).

They are characterized by thermal parameters variables within a limited range (as determined by the standard ANSI / ASHRAE 55-1992 - Thermal environmental conditions for human occupancy and UNI EN ISO 7730/1997 - Moderate thermal environments. Determination of PMV and PPD indices and specifications of condition of thermal comfort). They are:

- Air temperature (T_a) between 10 and 35°C;
- Temperature radiant (T_r) between 10 and 40°C;
- Relative Humidity (U_r) of between 30 and 70%;
- Air speed (V_a) of between 0 and 1.5 m/s.

In environments “moderates” must assess the deviation of actual conditions than those comfort heat-humidity (temperature varies between 18-26°, relative humidity ranging between 50-60% and speed of air less than 1 m/s). The methodology used for assessing indoor comfort is out experimentally measurements using in-situ monitoring parameters microclimatic interior and surface temperatures.

3 The study case: underground spaces in “Sassi di Matera”

The site is a part of the architectural complex particularly significant, already a heritage of UNESCO since 1993: the ancient “Rioni Sassi di Matera”, they are at an altitude of about 401m above sea level and are characterized by an aggregation of cells elementarily-called “the neighbourhood” that open towards the south-west.

The configuration of the complex morphology of the “Rioni Sassi” is that they can fully exploit the micro-climatic conditions of the site, characterized by hot and humid summers and mild winters.



The hypogea houses are arranged to horseshoe around a central atrium, (the "neighbourhood"), with exposure to the south; this exhibition allows a greater depth for the central caves, because they receive more sun and can more prolong inside the bench rock in which they are dug. The same homes are sloping inwards and so allow sunlight to penetrate in winter to the end, to heat and make healthy even the most hidden parts, while in summer, when the sun is highest, the most internal remain cooler.

In the site it is monitored three different types of hypogeous (with similar size and characteristics) of two hotels, the "Locanda di San Martino" and the "Hotel S. Angelo", different but similar at the same time in the forms and architectural peculiarities. They made it possible to compare environments with the same technological characteristics. In particular were considered a hypogeum not restored and a hypogeum restored, both in the "Locanda S. Martino" and a hypogeum restored and arrangements for use in "Hotel St. Angelo".

The monitoring was performed in the period from 10/04/2007 to 19/06/2007, a period characterised by a strong thermal excursion daily.

The instrumentation used was an environmental monitoring station with "multiacquisitore" LSI BABUC/A, equipped with 5 microclimatic probes:

- a probe globothermometric, for measuring the average temperature radiant;
- a probe psicrometric, for measuring the temperature of dry, humid temperature, temperature and dew on Relative Humidity;
- a probe anemometric portable hot-wire, for measuring the speed of the air;
- two thermometric probes (PT100), for the measurement of surface temperature.

The measurements were carried out using fixed locations within the hypogea, placing the unit at a height of about 1.70 meters above the ground (average human height) and in the middle of the space.

In the hypogea restored and arrangements for use measurements were made with air conditioning off and considering two different conditions of operation of local: with plant recirculation of environment on and with plant recirculation of environment off.

For each local monitored were detected 7 signals with a frequency acquisition equal to 15 minutes, corresponding to the values of:

- Temperature dry-bulb air (T_a);
- Temperature wet-bulb to forced ventilation (T_w): from T_a T_w and the unit automatically gives the dew point temperature (T_c) and relative humidity (U_r);
- Air speed (V_a);
- Wet-bulb temperature and natural ventilation (T_{nw});
- Temperature globo-thermometer of Vernon (T_g), from which the unit automatically derives the average temperature radiant (T_r);
- Surface temperature inside of the wall;
- Surface temperature of the external wall.



3.1 The behavior energy of not restored underground space

For architectures hypogea not restored means all those architectures that are in total state of disuse for many years.

And it is precisely the situation of total abandonment that often leads such architectures to situations of high relative humidity inside causing the formation of lichens and bacteria on the walls.

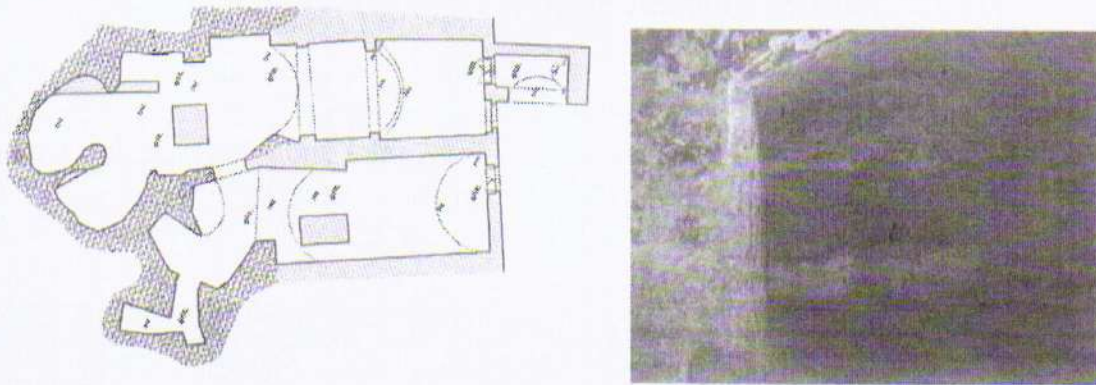


Figure 1: Not restored underground space.

The main characteristic of this type of environment is having a constant trend of microclimatic conditions during the indoor campaign measurements. Explicated in detail the individual values monitored we can say that the evolution of internal temperature had very small fluctuations (13-15°C), the average temperature radiant has remained constant during the measurement period (16°C), as well as the Relative Humidity (95%); as regards the speed and change of air, these values were next to zero.

Chart A refers to the entire period of monitoring.

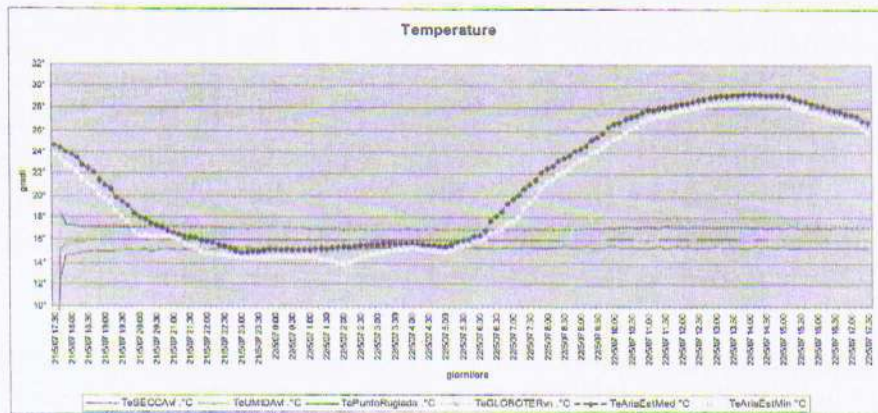


Chart A - Temperature of not restored underground space

As you can see from the charts, the slightest deviation of the values of dry-bulb temperature compared to the wet-bulb temperature and the dew-point temperature is the main cause high relative humidity indoor, allowing thus to lichens and bacteria to attacking the internal surfaces of the walls. In fact most of



moisture present on masonry surfaces is caused to the continuous absorption of high humidity in the air a contact with the walls and a tiny amount of the migration of water present in rock.

Monitoring of these environments allows us to understand the nature of moisture present on surfaces walls of these environments, and we can say that in such environments humidity caused to rising capillary infiltration of water through the walls is virtually absent.

3.2 The behavior energy of restored underground spaces

Let us now consider architectures hypogea restored, but has no system of operation and use. This classification includes all those architectures already recovered from the aspect static-functional and wholesomeness of the premises. The values monitored, as described above, refer to a hypogea architecture that is part of a complex used as accommodation.

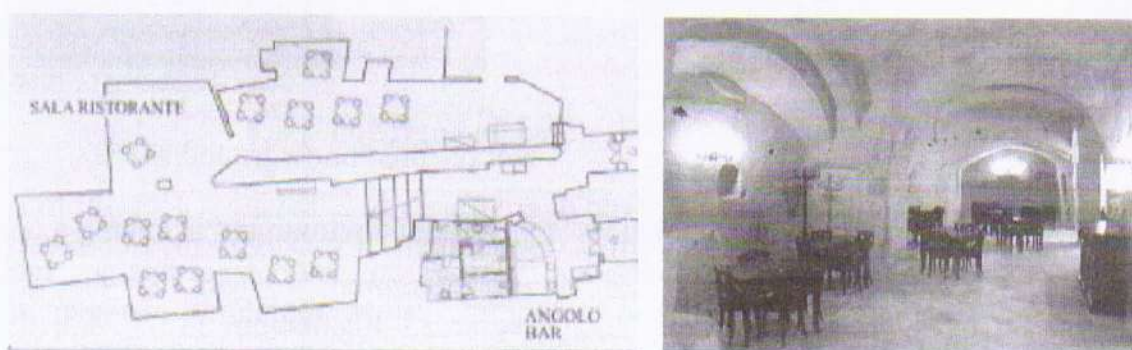


Figure 2: Restored underground space.

Again, the main characteristic of this type of architecture was to have microclimatic conditions indoor constant, even if with different values than the type not restored.

In fact the values of measured of the internal temperature air had increased by an average of 2°C compared to the type not redeveloped, stable at around 15°C , on the contrary the values of average temperature radiant remained identical (16°C).

The Relative Humidity, however, had a sudden drop of 20%, by reference to values more acceptable (about 65%), but still high respect on the standards. With regard to the speed and parts of air, again measured values are close to zero. The Chart B refers to the entire period of monitoring.

temperature, wet-bulb temperature and dew-point temperature, in the hypogeous not restored is almost nothing. Indeed, this difference has contributed to lowering relative humidity environment.

This analysis has highlighted the importance of indoor microclimate control as a prerequisite to design a proper (and effective!) intervention rehabilitation thermo-hygrotermic of the "Sassi of Matera".



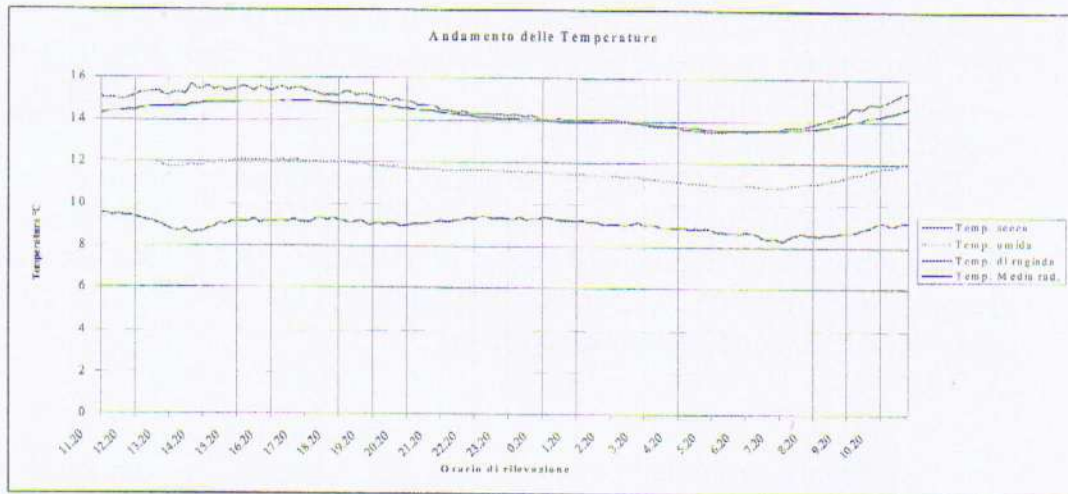


Chart B - Temperature of restored underground space.

Controlling indoor microclimate it will get comfort levels close to the minimum required by regulations of reference (indoor temperature of 18-20°C and relative humidity 50%).

3.3 The behavior energy of a rate of operation and use underground spaces

It is here described the behaviour thermo-hygrometric of a hypogea restored and operating system for many years.

In this configuration it was possible to make measurements with the planting of recycling and treatment of the environment on (UTA - air handling unit), which change air without conditioning. In this way the air blown into the air pushes vitiated air outwards in a natural way through the "light above" (small window above the front door), given appropriate open.

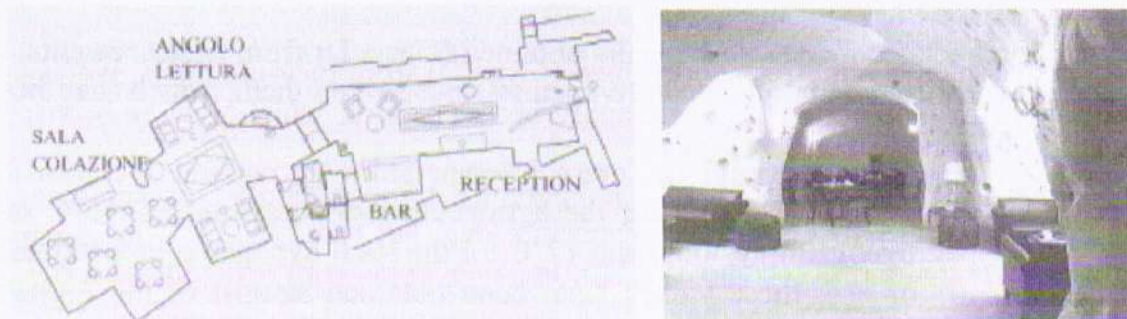


Figure 3: Rate of operation and use underground spaces.

The measurements made in this configuration made it possible to check the impact of the loop on the parameters of indoor comfort. It was also possible to verify the behaviour of environments hypogea in two different configurations: with recycling and fan system on and with recycling and fan system shut down.



The most important content found is that in those environments setting the UTA so as to change 5 volumes/day has obtained an drop relative humidity who rose from values around 65% valued at around 50% (value of comfort). Even in this configuration the temperature has had a constant evolution, but with slightly higher values (around 18°C).

The Chart C refers to the entire period of monitoring. So from these charts shows that in order to obtain adequate conditions of comfort thermo-hygrometric in the environments hypogea of "Sassi di Matera" we must anticipate, already in the process of recovery, a adequate recycling and fan system of the environment more that an air conditioning system.

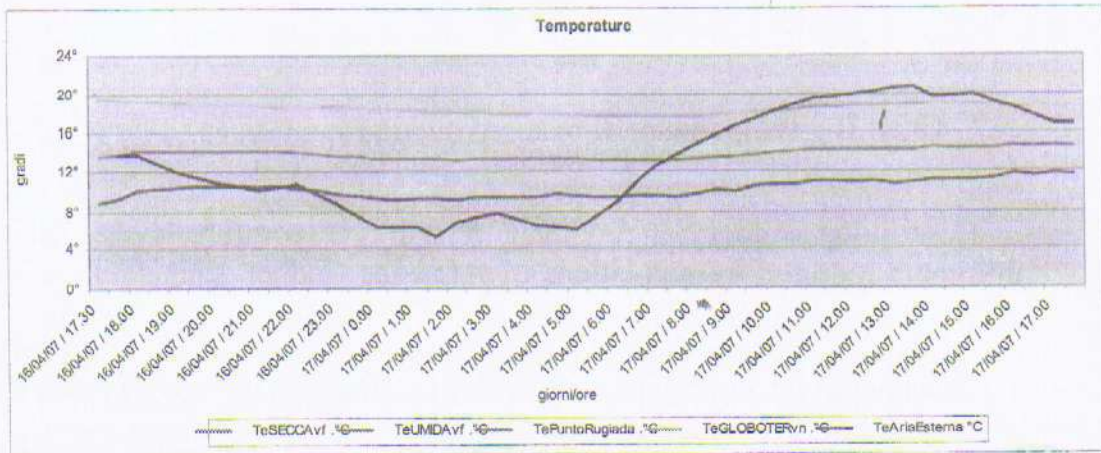


Chart C - Temperature of a rate of operation and use underground spaces.

Indeed assessing the UTA fairly compared to the size of the environment can to ensure acceptable levels of comfort, respectful of reference values established by legislation.

4 Analysis of the results

In conclusion, analyzing results obtained (Chart D) from measurements, we can make a critical and comparative summary between them, which may be briefly highlighted:

- Constant trend of internal temperature throughout the measurement period (13-15°C) for the hypogea local not restored, 15°C the local hypogea restored and 17°C for the local hypogea restored and a rate of use; these values have been obtained against of the high thermal fluctuations daily with values exceeding 20°C (5°C night and daytime 28°C).
- The average temperature radiant of the walls has remained constant in the two configurations not restored and restored with value of (16°C), while the configuring restored and a rate of use had a slight increase reaching values of 18°C constant.
- The relative humidity has undergone large variation in the various configurations of local monitored. In fact, is has gone from high values,



approximately 95% for local hypogeous not restored, values of 65% for local restored and values of 50% for hypogeous restored and a rate of operation and use.

The last data even if it falls in the values established by rule, it is the upper limit of the range of tolerance for local with a similar use. This incident, however, is easily solved by setting a mechanical indoor air change of the domestic environments; in fact considering a replacement average volumes 5 volume/day the relative humidity inside drops to values around 50%, acceptable to the use of environment.

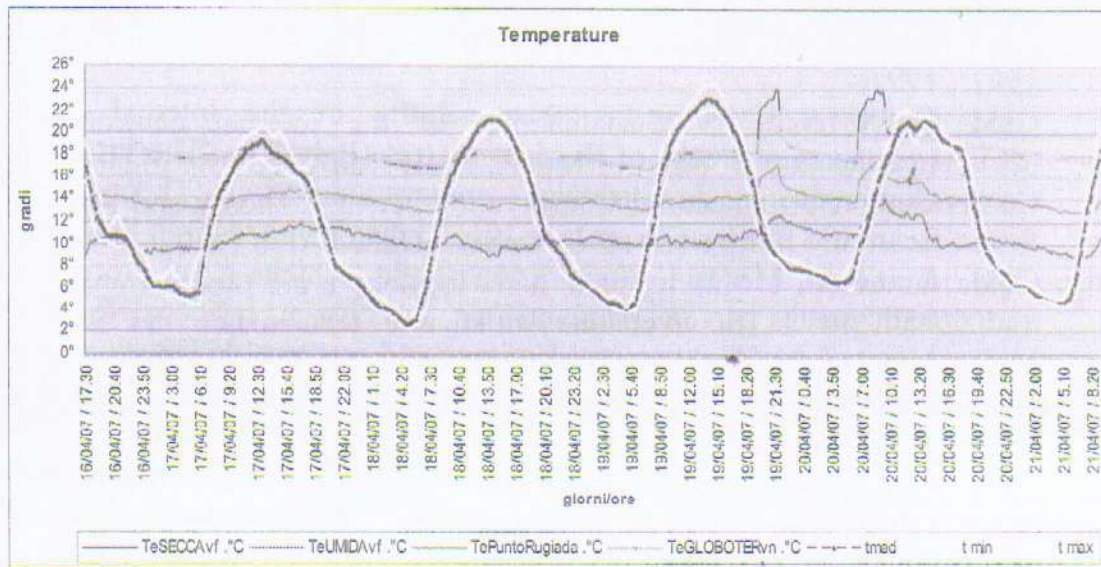


Chart D – Comparative chart.

5 Conclusions

The results of this evaluations shows that the parameters that govern the comfort “indoor” seem to assume, in the case of “Sassi di Matera”, values respectful of recent regulations, although they should necessarily be repeated and extended in order to validate and to confirm the obtained data.

The research, therefore, shows how these architectures, realized with traditional techniques and materials, are an example of “sustainable construction”, as can maximize the contributions in the solar cold season and minimise the hot season, taking advantage of the mass of the ground fly as thermal and encouraging natural ventilation of the environment. The “Sassi di Matera”, therefore, seems to be almost a model of “bioarchitecture” in which natural stone, used “with wisdom”, plays the key role of regulation. The study, in a further step, must systematize the data collected and deepen the study of “Sassi model” in order to reach the definition of methodological approaches and operational solutions to recovery the internal quality performance in similar contexts.



References

- [1] Cotecchia V. Studio geologico-tecnico e stato di conservazione, in "Concorso Internazionale per la sistemazione dei Sassi di Matera", Matera, Italy, 1974.
- [2] Cannarile. M., tesi di diploma, "Il risanamento da umidità dei Sassi di Matera: diagnosi e ipotesi di intervento su un ipogeo", Matera, Italy, 1995.
- [3] Giuffrè A., Carocci C., Codice di pratica per la sicurezza e la conservazione dei Sassi di Matera, La Bauta, Matera, Italy, 1997.
- [4] Buchicchio C., tesi di laurea, "Problemi tecnologici e di risanamento igienico nel recupero dei Sassi di Matera: un caso di studio", Matera, Italy, 1997.
- [5] Guida A., Mecca I., "Sustainability of the internal environmental treatments: the case of Sassi of Matera (Italy)" in "The First International Conference on: Architectural Conservation between Theory and Practice", Scientific Book e CD pp 189–196, Dubai – United Arab Emirates, 2004.
- [6] Guida A., Mecca I. "Innovazione nelle tecniche e nei processi costruttivi tradizionali per la riconversione turistica e residenziale dei Sassi di Matera", in "Architectural Heritage and Sustainable Development of Small and Medium Cities in South Mediterranean Regions", Collana Architettura, Ed. ETS Firenze, pp.443–458, ISBN 88-467-1199-8, 2005.
- [7] A. Pagliuca, A. Guida, F. Fatiguso, "Stone building envelopes performance qualities: the "Sassi di Matera" (Italy)" - in proceedings of the ART2008 - 9th International Art Conference – "Non-destructive investigations and microanalysis for the diagnostics and conservation of cultural and environmental heritage", Jerusalem, Israel, 2008.
- [8] N. Cardinale, A. Guida, F. Ruggiero, "Thermo-Hygrometric Evaluations in the Recovery of Rocky Buildings of the "Sassi of Matera" (Italy)" – Journal of THERMAL ENV. & BLDG. SCI., vol. 24-04-2001.
- [9] N. Cardinale, F. Ruggiero, " A case study on the environmental measures techniques for the conservation in the vernacular settlements in Southern Italy" – BUILDIND AND ENVIRONMENT, 2002.
- [10] G. Rospi, " Recupero architettonico e progettazione energetica delle architetture tradizionali mediterranee" – CODAT Meeting – Ancona, 2007.



UNDERGROUND SPACES

Design, Engineering and Environmental Aspects

WIT Transactions on the Built Environment, Volume 102

Underground spaces are becoming increasingly important for a wide diversity of uses. They range from classical excavations to subway constructions, underground sports halls, power stations, waste repositories, underground cities and many others. The construction techniques are also very varied, from open air excavation to newly developed injection methods.

The use of underground spaces is challenging to a wide spectrum of engineers, designers, builders and constructors. Structures constructed below the terrain require special attention in their design and safety assessment. This means that the knowledge needs to be significantly higher than for surface structures and hence the importance of conferences like Underground Spaces to reach a better understanding of the issues involved. This is particularly the case when preparing to build chemical, nuclear or toxic waste repositories, where serious environmental issues can arise.

This book contains some of the papers presented at the International Conference on Underground Spaces – Design, Engineering and Environmental Aspects, held on the Campus of the Wessex Institute of Technology in the New Forest. The Conference was launched to discuss not only the structural and environmental material characterization aspects but also the trends regarding the development of underground spaces.

Titles of related interest:

High Performance Structures and Materials IV

Editors: W.P. De WILDE, C.A. BREBBIA

WIT Transactions on The Built Environment, Vol 97

ISBN: 978-1-84564-106-1 2008 576pp

Structures Under Shock and Impact X

Editors: N. JONES, C.A. BREBBIA

WIT Transactions on The Built Environment, Vol 98

ISBN: 978-1-84564-107-8 2008 416pp

Influence Function Approach

Selected Topics of Structural Mechanics

Editor: Y. MELNIKOV

ISBN: 978-1-84564-129-0 2008 400pp

ISBN: 978-1-84564-125-2

ISSN (print): 1746-4498

ISSN (online): 1743-3509



Email: witpress@witpress.com

www.witpress.com

ISBN 978-1-84564-125-2



9 781845 641252